

Contents

- Safety precautions 3
- Choosing the installation location 5
- Accessories 8
- Fixing the installation plate 9
- Connecting the assembly cable 10
- Installing and connecting the assembly
pipe of the indoor unit 12
- Purging the indoor unit 13
- Cutting or extending the pipe 13
- Installing and connecting the
drain hose of the indoor unit 14
- Changing direction of the drain hose 15
- Installing and connecting the
drain hose of the outdoor unit 16
- Purging the connected pipes 16
- Performing the gas leak tests 19
- Fixing the indoor unit in place 20
- Fixing the outdoor unit in place 20
- Final check and trial operation 21
- Pump down procedure
(when removing the product) 21
- How to connect your extended power cables 22

※ In this manual, you may find model names written in simplified forms as indicated in following table.

Model Names	Included Models	Remark
AQV**E*	AQV09E*, AQV12E*, AQV18E*, AQV24E*	Grouping was done by series.
09	AQV09E*	Grouping was done by capacity.
12	AQV12E*	
18	AQV18E*	
24	AQV24E*	

Safety precautions

Carefully follow the precautions listed below because they are essential to guarantee the safety of the equipment.

- Always disconnect the air conditioner from the power supply before servicing it or accessing its internal components.
- Verify that installation and testing operations are performed by qualified personnel.
- Verify that the air conditioner is not installed in an easily accessible area.

General information

- ▶ Carefully read the content of this manual before installing the air conditioner and store the manual in a safe place in order to be able to use it as reference after installation.
- ▶ For maximum safety, installers should always carefully read the following warnings.
- ▶ Store the operation and installation manual in a safe location and remember to hand it over to the new owner if the air conditioner is sold or transferred.
- ▶ This manual explains how to install an indoor unit with a split system with two SAMSUNG units.
The use of other types of units with different control systems may damage the units and invalidate the warranty.
The manufacturer shall not be responsible for damages arising from the use of non compliant units.
- ▶ The air conditioner is compliant with the requirements of the Low Voltage Directive (72/23/EEC), the EMC Directive (89/336/EEC) and the Directive on pressurized equipment (97/23/EEC).
- ▶ The manufacturer shall not be responsible for damage originating from unauthorized changes or the improper connection of electric and requirements set forth in the "Operating limits" table, included in the manual, shall immediately invalidate the warranty.
- ▶ Do not use the units if damaged. If problems occur, switch the unit off and disconnect it from the power supply.
- ▶ In order to prevent electric shocks, fires or injuries, always stop the unit, disable the protection switch and contact SAMSUNG's technical support if the unit produces smoke, if the power cable is hot or damaged or if the unit is very noisy.
- ▶ Always remember to inspect the unit, electric connections, refrigerant tubes and protections regularly. These operations should be performed by qualified personnel only.
- ▶ The unit contains moving parts, which should always be kept out of the reach of children.
- ▶ Do not attempt to repair, move, alter or reinstall the unit. If performed by unauthorized personnel, these operations may cause electric shocks or fires.
- ▶ Do not place containers with liquids or other objects on the unit.
- ▶ All the materials used for the manufacture and packaging of the air conditioner are recyclable.
- ▶ The packing material and exhaust batteries of the remote controller(optional) must be disposed of in accordance with current laws.
- ▶ The air conditioner contains a refrigerant that has to be disposed of as special waste. At the end of its life cycle, the air conditioner must be disposed of in authorized centers or returned to the retailer so that it can be disposed of correctly and safely.

Safety precautions

Installing the unit

IMPORTANT: When installing the unit, always remember to connect first the refrigerant tubes, then the electrical lines.

Always disassemble the electric lines before the refrigerant tubes.

- ▶ Upon receipt, inspect the product to verify that it has not been damaged during transport. If the product appears damaged, **DO NOT INSTALL** it and immediately report the damage to the carrier or retailer (if the installer or the authorized technician has collected the material from the retailer.)
- ▶ After completing the installation, always carry out a functional test and provide the instructions on how to operate the air conditioner to the user.
- ▶ Do not use the air conditioner in environments with hazardous substances or close to equipment that release free flames to avoid the occurrence of fires, explosions or injuries.
- ▶ To prevent injury when accidentally touching the indoor unit fan, install the indoor unit at least 2.5m above the floor.
- ▶ The air conditioner should be used only for the applications for which it has been designed : the indoor unit is not suitable to be installed in areas used for laundry.
- ▶ Our units must be installed in compliance with the spaces indicated in the installation manual to ensure either accessibility from both sides or ability to perform routine maintenance and repairs. The units' components must be accessible and that can be disassembled in conditions of complete safety either for people or things.
For this reason, where it is not observed as indicated into the Installation Manual, the cost necessary to reach and repair the unit (in safety, as required by current regulations in force) with slings, trucks, scaffolding or any other means of elevation won't be considered in-warranty and charged to end user.

Power supply line, fuse or circuit breaker

- ▶ Always make sure that the power supply is compliant with current safety standards. Always install the air conditioner in compliance with current local safety standards.
- ▶ Always verify that a suitable grounding connection is available.
- ▶ Verify that the voltage and frequency of the power supply comply with the specifications and that the installed power is sufficient to ensure the operation of any other domestic appliance connected to the same electric lines.
- ▶ Always verify that the cut-off and protection switches are suitably dimensioned.
- ▶ Verify that the air conditioner is connected to the power supply in accordance with the instructions provided in the wiring diagram included in the manual.
- ▶ Always verify that electric connections (cable entry, section of leads, protections...) are compliant with the electric specifications and with the instructions provided in the wiring scheme.
Always verify that all connections comply with the standards applicable to the installation of air conditioners.

Choosing the installation location

Indoor unit

- ▶ Where airflow is not blocked
- ▶ Where cool air can be distributed throughout the room
- ▶ Install the refrigerant piping length and the height difference of both indoor and outdoor units as indicated in the installation diagram
- ▶ Wall that prevents vibration and is strong enough to hold the product weight
- ▶ Out of the direct sunlight
- ▶ 1m or more away from the TV or radio (to prevent the screen from being distorted or noise from being generated)
- ▶ As far away as possible from the fluorescent and incandescent lights (so that the remote controller can be operated well)
- ▶ A place where the air filter can be replaced easily

Outdoor Unit


- ▶ Where it is not exposed to strong wind
- ▶ Well ventilated and dustless places
- ▶ Out of the direct sunlight and rain
- ▶ Where neighbors are not annoyed by operation sound or hot air
- ▶ Solid wall or support that prevents vibration and is strong enough to hold the product weight
- ▶ Where there is no risk of flammable gas leakage
- ▶ When installing the unit at a high place be sure to fix the unit legs
- ▶ 3m or more away from the TV or radio (to prevent the screen from being distorted or noise from being generated)
- ▶ Install the unit horizontally
- ▶ Place where drained water does not become any problem.
- ▶ Place with no plants (especially climbing plants) and where small animal can not access.



- Avoid the following places to prevent malfunction of the unit
 - Where there is machine oil
 - Salty environment such as seaside areas
 - Where sulfide gas exists
 - Other special atmosphere areas

Choosing the installation location


Observe the clearances and maximum lengths as seen in the picture below when installing the air conditioner.

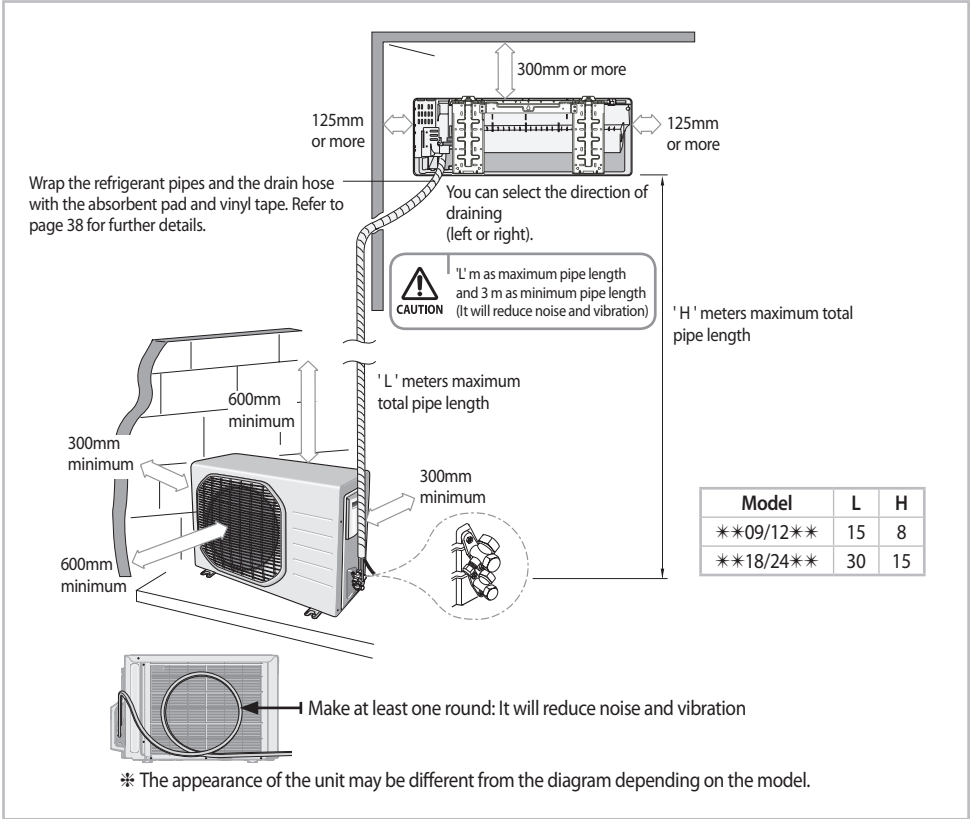

Space Requirements for Outdoor Unit

When installing 1 outdoor unit


◆ Figure Description

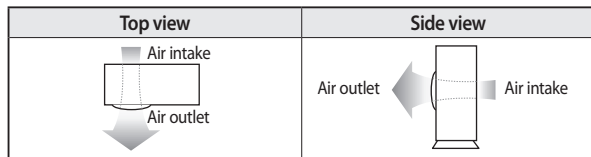


◆ Air flow direction.

(Unit : mm)


◆ When the air outlet is opposite the wall




◆ When the air outlet is towards the wall




◆ When 3 sides of the outdoor unit are blocked by the wall




◆ The upper part of the outdoor unit and the air outlet is towards the wall



◆ The upper part of the outdoor unit and the air outlet is opposite the wall




◆ When the walls are blocking front and the rear side of the outdoor unit




When installing more than 1 outdoor unit

(Unit : mm)

◆ When the air outlet is towards the wall




◆ When 3 sides of the outdoor unit are blocked by the wall

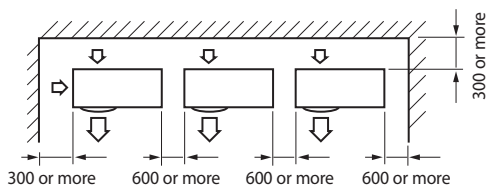


Choosing the installation location

(Unit : mm)


◆ When the walls are blocking front and the rear side of the outdoor units

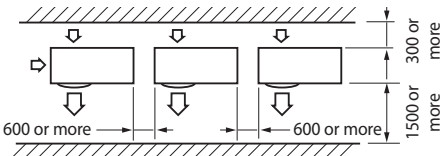

◆ When front and rear side of the outdoor unit is towards the wall

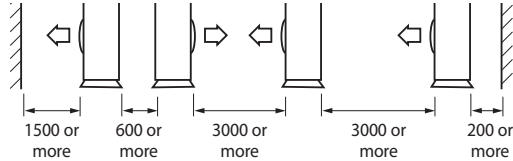

◆ When the upper part of the outdoor unit and the air outlet is opposite the wall



- If installation is done in inappropriate space, unit may generate sound and cause bad effect on the product.
- Installation must be done in level and in a place where vibration will not cause any effect.






Accessories

The following accessories are supplied with the air conditioner:







- The number of each accessory is indicated in parentheses.

Accessories in the indoor unit case

Installation Plate (1) 	Remote controller (1) 	Batteries for Remote controller (2) 	User's Manual (1) 	Installation Manual (1) 
--	---	---	---	--

Accessories in the outdoor unit case

2-wire Assembly Cable (1) 	3-wire Assembly Cable (1) 	Drain Plug (1) 	Rubber Leg (4) 
---	--	---	---



- The flare nuts are attached to the end of each pipe of an evaporator or a service port. Use the nuts when connecting the pipes.
- The (2)3-wire assembly cable is optional. If it is not supplied, use the standard cable.
- The drain plug and rubber leg are only included when the air conditioner is supplied without the assembly pipe as seen in the picture.

Optional accessories

The following connection accessories are optional. If they are not supplied, you should obtain them before installing the air conditioner.

Insulated Assembly Pipe, Ø6.35mm (1) 	Insulated Assembly Pipe, Ø9.52mm (1) **09/12** 	Insulated Assembly Pipe, Ø12.70mm (1) **18** 	Insulated Assembly Pipe, Ø15.88mm (1) **24** 	PE T3 Foam Tube Insulation (1) 	Vinyl Tapes (2) 	Drain Plug (1)
Rubber Legs (4) 	Pipe Clamps A (3) 	Pipe Clamps B (3) 	Cement Nails (6) 	M4 x 25 Tapped Screws (6) 	Drain Hose, length 2m (1) 	Putty 100g (1)



• If these accessories are supplied, they will be in the accessory box.

Tools required for installation

General Tools

- Vacuum Pump (Backward flowing prevention)
- Torque Wrench
- Screw Driver
- Pipe Cutter
- Spanner
- Reamer
- Drill
- Manifold Gauge
- Pipe Bender
- L Wrench
- Stud Finder
- Spirit Level
- Measuring Tape

Tools for test operations


- Thermometer
- Resistance Meter
- Electroscope

Fixing the installation plate


You can select the direction of the drain hose depending on where you want to install the indoor unit. Therefore before fixing the installation plate to a wall or a window frame, you must determine the position of the 65mm hole through which the cable, pipe and hose pass to connect the indoor unit to the outdoor unit.

When facing the wall, the pipe and cable can be connected from the:

- Right (A)
- Left (B)
- Underside_right (C)
- Rear_right or left (D)



1. Determine the position of the pipe and drain hose hole as seen in the picture and drill the hole with an inner diameter of 65mm so that it slants slightly downwards.



(Unit : mm)

Model	A	B	C	D
09/12	27	120	68	27
18/24	34	140	68	34



• Make sure to drill only one hole after choosing the direction of the pipe.

Fixing the installation plate


2. Fix the indoor unit.

If you fix the indoor unit on a wall

(1) Fix the installation plate to the wall giving attention to the weight of the indoor unit.



- If you mount the plate to a concrete wall using plastic anchors, make sure that gaps between the wall and the plate, created by projected anchor, is less than 20mm.



If you fix the indoor unit on a window frame

- (1) Determine the positions of the wooden uprights to be attached to the window frame.
- (2) Attach the wooden uprights to the window frame giving attention to the weight of the indoor unit.
- (3) Attach the installation plate to the wooden upright using tapping screws.

If you fix the indoor unit on a gypsum board

- (1) Use stud finder to find out locations of the studs.
- (2) Fix the plate hanger on two studs.



- Search for other spots if there are less than two studs, or the distance between the studs are different from the plate hanger.
- Fix the installation plate without inclining to one side.



- Make sure that a wall can withstand the weight of the product. If you install the product in a place where it is not strong enough to withstand the product weight, the unit could fall and cause injury.

Connecting the assembly cable

Cable specification

Model	Power cable	Interconnection cable	Type GL
09/12	3G, 2.5mm ² H07RN-F	3G, 1.5mm ² H07RN-F	20A
18/24		2G, 0.75mm ² H05RN-F	25A




- Connect the power cable to the auxiliary circuit breaker. If every pole fails to connect to the power supply, it must be incorporated in a wire with a contact opening of ≥3mm.


Connecting the cable(**18/24**)

Electrical work

- 1) For electrical and earth works, comply with the 'technical standards of electrical installations' and the 'wiring regulations' of the Electricity Enterprises Act.
- 2) Tighten the terminal block screw to under 12kgf.cm.
- 3) Precautions when connecting terminal blocks of the indoor unit
 - ▶ Before connecting, make sure the connecting part of the terminal socket is facing upwards.



- ▶ There must be no space between the terminal and the screw when connected.
 - Any remaining space may become a fire hazard due to overheating of the electrical contact.



- For the terminal block wiring, use a wire with a ring terminal socket only.
Regular wires without a ring terminal socket may become a fire hazard due to overheating of the electrical contact during a wiring work.

※ When you install the unit, make first refrigerant connections and then electrical connections.
 Connect the air conditioner to grounding system before performing the electrical connection.
 If unit is uninstalled, first disconnect electrical cables, then refrigerant connections.
 If the outdoor unit is more than 5 meters away from the indoor unit, you must extend the cable.
 The maximum length of the cable is $15(※※09/12※※)/20(※※18/24※※)$ meters.

1. Extend the assembly cable if necessary.



- Do not connect two or more different cables to extend the length.
It may cause fire.

2. Open the front grille.

3. Remove the screw securing the connector cover.

4. Pass the assembly cable through the rear of the indoor unit and connect the assembly cable to terminals.
 (Refer to the picture below)



- Each wire is labeled with the corresponding terminal number.

5. Pass the other end of the cable through the 65mm hole in the wall.

6. Close the connector cover by tightening the screw carefully.

7. Close the front grille.

8. Remove the terminal board cover on the side of the outdoor unit.

9. Connect the cables to the terminals as seen in the picture.




- Each wire is labeled with the corresponding terminal number.

Indoor unit



Outdoor unit



※ The appearance of the unit may be different from the diagram depending on the model.



- End of the wire must be circular.
- Also circular terminal must be matched with screw size in terminal block.
- After connecting the cables, make sure terminal numbers on the indoor/outdoor unit matches.
- Screws on terminal block must not be unscrewed with the torque less than 12kgf·cm.

10. Connect the grounding conductor to the grounding terminals.

11. Close the terminal board cover by tightening the screw carefully.



- In Russia and Europe, consult with the supply authority to determine the supply system impedance before installation.



- Connect the wires according to color codes, referring to the wiring diagram.
- The power cable and the interconnection cable should be selected according to the specification in page 28.

Installing and connecting the assembly pipe of the indoor unit

Connect indoor and outdoor units with field-supplied copper pipes by means of flare connections. Use insulated seamless refrigeration grade pipe only, (Cu DHP type according to ISO1337), degreased and deoxidized, suitable for operating pressures of at least 4200 kPa and for burst pressure of at least 20700 kPa. Under no circumstances must sanitary type copper pipe be used.


There are 2 refrigerant pipes of different diameters:

- The smaller one is for the liquid refrigerant
- The larger one is for the gas refrigerant

A short pipe is already fitted to the air conditioner. You may need to extend the pipe using the assembly pipe (optional).

The connection procedure for the refrigerant pipe varies according to the exit position of the pipe when facing the wall:

- Right(A)
- Left(B)
- Underside(C)
- Rear

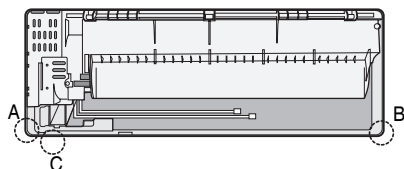

1. Cut out the appropriate knock-out piece (A, B, C) on the rear of the indoor unit unless you connect the pipe directly from the rear.
2. Smooth the cut edges.
3. Remove the protection caps of the pipes and connect the assembly pipe to each pipe. Tighten the nuts first with your hands, and then with a torque wrench, applying the following torque:

Outer Diameter	Torque (kgf-cm)
ø6.35 mm	140~170
ø9.52 mm	250~280
ø12.70 mm	380~420
ø15.88 mm	440~480
ø19.05 mm	990~1210
ø22.23 mm	990~1210



- If you want to shorten or extend the pipes, refer to page 31~32.

4. Cut off the remaining foam insulation.
5. If necessary, bend the pipe to fit along the bottom of the indoor unit. Then pull it out through the appropriate hole.
 - ▶ The pipe should not project from the rear of the indoor unit.
 - ▶ The bending radius should be 100 mm or more.
6. Pass the pipe through the hole in the wall.
7. For further details on how to connect to the outdoor unit and purge the air, refer to page 34~36.



- The pipe will be insulated and fixed permanently into position after finishing the installation and the gas leak test; refer to page 37 for further details.



- Tighten the flare nut with torque wrench according to specified method. If the flare nut is over-tightened, the flare may break and cause refrigerant gas leakage.
- DO NOT WALL UP THE PIPE CONNECTION !
All refrigerant pipe connection must be easy accessible and serviceable.

Purging the indoor unit

The indoor unit is supplied with inert gas (nitrogen).

Before installing the unit, check if nitrogen gas flow out of indoor unit.


If this one isn't true, DO NOT INSTALL THE UNIT since leakage could be inside the indoor unit.

1. Unscrew the caps at the end of each pipe.

- All inert gas exhausts from the indoor unit.



- To prevent dirt or foreign substances from getting into the pipes during installation, do NOT remove the caps completely until you are ready to connect the pipes.



- The remaining air in the Refrigeration cycle, which contains moisture, may cause malfunction on the compressor.
- Always contact the service center or a professional installation agency for product installation.

Cutting or extending the pipe

A 5-meter pipe is supplied with the air conditioner (optional NOT FOR ITALY).

The length of the pipe can be:

- Extended up to : see table page 24
- Shorten up to: see page 24







If you need a pipe longer than 5 meters:

- You must extend the assembly cable.
- You must add refrigerant to the pipes; otherwise, the indoor unit may freeze.

1. Make sure that you have all the required tools (pipe cutter, reamer, flaring tool and pipe holder).

2. If you want to shorten the pipe, cut it using a pipe cutter, ensuring that the cut edge remains at 90° with the side of the pipe (see below examples of correct and incorrect cut edges).




3. To prevent a gas leak, remove all burrs at the cut edge of the pipe using a reamer.



- Face the pipe down while removing the burrs to make sure that burrs do not get in to the pipe.

4. Put a flare nut slightly into the pipe and modify the flare.

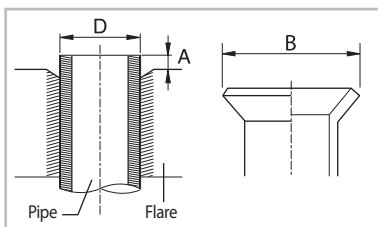


Outer Diameter (D)	Depth (A)	Flaring Size (B)
ø6.35 mm	1.3 mm	9.0 mm
ø9.52 mm	1.8 mm	13.0 mm
ø12.70 mm	2.0 mm	16.2 mm
ø15.88 mm	2.2 mm	19.3 mm
ø19.05 mm	2.2 mm	22.5 mm
ø22.23 mm	2.2 mm	25.7 mm

Cutting or extending the pipe

5. Check if you flared the pipe correctly (see examples of incorrectly flared pipes below).



6. Align the pipes to connect them easily. Tighten the flare nuts first with your hands, and then with a torque wrench, applying the following torque:

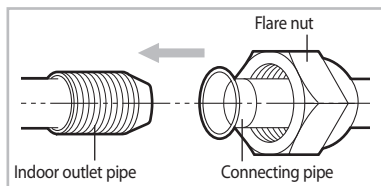

Outer Diameter	Torque (kgf·cm)
ø6.35 mm	140~170
ø9.52 mm	250~280
ø12.70 mm	380~420
ø15.88 mm	440~480
ø19.05 mm	990~1210
ø22.23 mm	990~1210



- Excessive torque can cause gas leakage. In case brazing the pipe, the nitrogen gas must be blown into the pipe (50 Pa). The joint must be accessible and serviceable.

7. For further details on how to connect to the outdoor unit and purge the air, refer to page 34~36.





- Tighten the flare nut with torque wrench according to specified method. If the flare nut is over-tightened, the flare may break and cause refrigerant gas leakage.


Installing and connecting the drain hose of the indoor unit

When installing the drain hose for the indoor unit, check if condensation draining is adequate.


When passing the drain hose through the 65-mm hole drilled in the wall, check the followings:




The drain hose must NOT slant upwards.




The end of the drain hose must NOT be placed under water.



The drain hose must not be bent.



Keep a clearance of at least 5cm between the end of the drain hose and the ground.




Do not place the end of the drain hose in a hollow.

Drain hose installation


1. If necessary, connect the 2-meter extension drain hose to the drain hose.
2. If you use the extension drain hose, insulate the inside of the extension drain hose with a shield.
3. Fit the drain hose into 1 of 2 drain hose holes, then fix the end of the drain hose tightly with a clamp.



- If you do not use the other drain hose hole, block it with a rubber stopper.



4. Pass the drain hose under the refrigerant pipe, keeping the drain hose tight.
5. Pass the drain hose through the hole in the wall. Check if it slants downwards as seen in the picture.



- The hose will be fixed permanently into position after finishing the installation and the gas leak test; refer to page 37~38 for further details.





- Make sure the installed direction of the drain hose is correct. Inadequate installation may cause condensate water leakage.
- If the drain hose is routed inside the room, insulate the hose so that dripping condensation does not damage the furniture or floors.
- DO NOT WALL UP THE DRAIN HOSE CONNECTION !
Drain hose connection must be easy accessible and serviceable.

Changing direction of the drain hose



Change the direction only when it is necessary.

1. Detach the rubber cap with the plier.
2. Detach the drain hose by pulling it and turning to the left.
3. Insert the drain hose by fixing it with the screw into the groove of the drain hose and the outlet of the drain pan.
4. Attach the rubber cap with a screwdriver by turning it to the right until it fixes to the end of the groove.
5. Check for leakage on both side of the drain outlet.



Pour the water in direction of arrow.

* Direction of the drained water



- Make sure the indoor unit is in upright position when you pour water to check for leakage. Make sure that the water does not overflow onto the electrical part.

Installing and connecting the drain hose of the outdoor unit

While heating, ice may accumulate. During the process of defrosting, check if condensation draining is adequate. For adequate draining, do the following:

1. Insert the drain plug into the drain hole on the underside of the outdoor unit.




- To avoid drain plug from contacting the ground, secure gap between the ground and the bottom surface of the outdoor unit.

2. Connect a drain hose to the drain plug.

3. Ensure that condensation draining is adequate.



- In areas with heavy snow fall, piled snow could block the air intake. To avoid this incident, install a frame that is higher than estimated snow fall. In addition, install a snow-proof hood to avoid snow from piling on the outdoor unit.

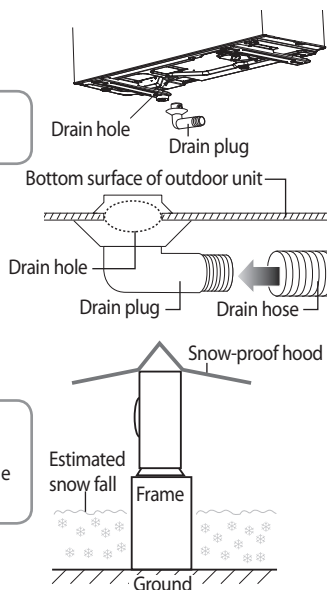

Purging the connected pipes

The outdoor unit is loaded with sufficient R410A refrigerant. Do not vent R410A into atmosphere: it is a fluorinated greenhouse gas, covered by Kyoto Protocol, with a Global Warming Potential (GWP) = 1975.

You should purge the air in the indoor unit and in the pipe. If air remains in the refrigerant pipes, it affects the compressor. It may cause reduction of cooling capacity and malfunction. Refrigerant for air purging is not charged in the outdoor unit. Use Vacuum Pump as seen in the picture.



- When installing, make sure there is no leakage. When recovering the refrigerant, ground the compressor first before removing the connection pipe. If the refrigerant pipe is not properly connected and the compressor works with the service valve open, the pipe inhales the air and it makes the pressure inside of the refrigerant cycle abnormally high. It may cause explosion and injury.


1. Connect each assembly pipe to the appropriate valve on the outdoor unit and tighten the flare nut.
2. Tighten the flare nut first with your hands, and then with a torque wrench, applying the following torque:



- Excessive torque can be cause of gas leakage.




- Make the electrical connection and leave the system into "stand by mode". Do not turn on the system! This is necessary for better vacuum operation (full OPEN position of Electronic Expansion Valve - EEV -).




Outer Diameter	Torque (kgf·cm)
ø6.35 mm	140~170
ø9.52 mm	250~280
ø12.70 mm	380~420
ø15.88 mm	440~480
ø19.05 mm	990~1210
ø22.23 mm	990~1210

3. Connect the charging hose of the low-pressure side of manifold gauge to a gas service port as seen in the picture.
4. Open the valve of the low pressure side of manifold gauge counterclockwise.
5. Purge the air in the connected pipes using the vacuum pump for about 15 minutes.
 - ▶ Make sure that pressure gauge shows $-0.1\text{MPa}(-76\text{cmHg})$ after about 10 minutes.
This procedure is very important to avoid a gas leak.
 - ▶ Close the valve of the low pressure side of manifold gauge clockwise.
 - ▶ Turn off the vacuum pump.
 - ▶ Check for 2 minutes if there is any pressure change.
 - ▶ Remove the hose of the low pressure side of manifold gauge.

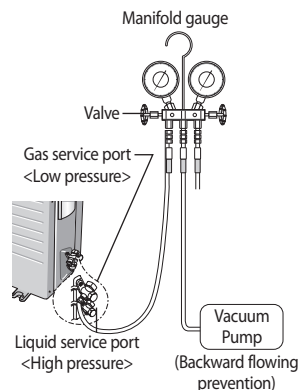

6. Set a valve cork of liquid and gas service port to the open position.
7. Mount the valve stem nuts and the service port cap to the valve, and tighten them at the torque of $183\text{kgf}\cdot\text{cm}$ with a torque wrench.
8. Check for a gas leak paying particular attention to the 3-way valve's stem nuts and to the service port cap (Refer to page 37).



Adding Refrigerant

Add refrigerant charge according to table below:

If you use a pipe longer than 5m,

'15'g of refrigerant R410A must be added for each extra meter.

If you use a pipe shorter than 5m,

The purge time is normal.

Refer to the Service Manual for further details.



- The remaining air in the Refrigeration cycle, which contains moisture, may cause malfunction on the compressor.
- Always contact the service center or a professional installation agency for product installation.

Purging the connected pipes

Important information regulation regarding the refrigerant used

This product contains fluorinated greenhouse gases covered by the Kyoto Protocol.
Do not vent gases into the atmosphere.

Refrigerant type	GWP value
R410A	1975

* GWP=Global Warming Potential


1. Please fill in with indelible ink,

- ▶ ① the factory refrigerant charge of the product,
- ▶ ② the additional refrigerant amount charged in the field and
- ▶ ①+② the total refrigerant charge, on the refrigerant charge label supplied with the product.



- a. Factory refrigerant charge of the product: see unit name plate
- b. Additional refrigerant amount charged in the field (Refer to the above information for the quantity of refrigerant replenishment.)
- c. Total refrigerant charge
- d. Refrigerant cylinder and manifold for charging

Contains fluorinated greenhouse gases covered by the Kyoto Protocol.




- The filled-out label must be adhered in the proximity of the product charging port (e.g. onto the inside of the stop valve cover).

Charging the refrigerant under conditions of liquid by using a liquid pipe

R410A is a mixed type of refrigerant. It is necessary for recharging under conditions of liquid. When recharging refrigerant from the refrigerant cylinder to the equipment, follow the instructions below.

- ### 1. Before recharging, check whether the cylinder has a siphon or not.
- There are two ways to recharge the refrigerant.

Cylinder with siphon



- ▶ Charge the refrigerant standing the cylinder upright.

Cylinder without siphon




- ▶ Charge the refrigerant turning the cylinder upside down.



- If R410A refrigerant is charged with gas, the composition of the charged refrigerant changes and the characteristics of the equipment vary.
- During the measuring operation of refrigerant quantity added use an electronic balance. If cylinder doesn't have syphon, upset it.

Performing the gas leak tests

Make sure to check for gas leaks before completing the installation process (connecting the assembly pipe and hose between indoor unit and outdoor unit, insulating the cables, hose and pipe, and fixing the indoor unit to the installation plate).

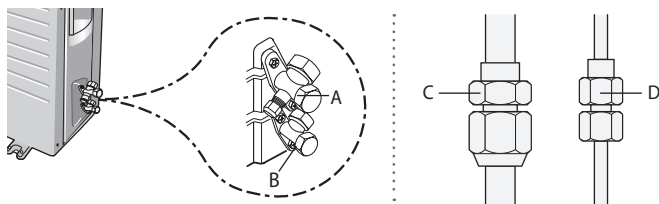

To check for gas leaks on the outdoor unit,

Check the valve A and B using a leak detector.

To check for gas leaks on the indoor unit,

Check the flare nut C and D using a leak detector.

Leak test with nitrogen (before opening valves)

In order to detect basic refrigerant leaks, before recreating the vacuum and recirculating the R410A, it's responsible of installer to pressurize the whole system with nitrogen (using a cylinder with pressure reducer) at a pressure above 40 bar (gauge).

Leak test with R410A (after opening valves)

Before opening valves, discharge all the nitrogen from the system and create vacuum according to page 34~36. After opening valves, check leaks using a leak detector for refrigerant.

Pump down (before disconnecting the refrigerant connections for unit repair, removal or disposal)

Pump-down is an operation intended to collect all the system refrigerant in the outdoor unit.

This operation must be carried out before disconnecting the refrigerant tubing in order to avoid refrigerant loss to the atmosphere.


- ▶ Shut off the liquid valve with the Allen wrench.
- ▶ Turn the system on in cooling with fan operating at high velocity.
(Compressor will immediately start, provided 3 minutes have elapsed since the last stop).
- ▶ After 2 minutes of operation, shut the suction valve with the same wrench.
- ▶ Turn the system off and switch mains supply off.
- ▶ Disconnect tubing. After disconnection, protect valves and tubing ends from dust.
- ▶ Compressor damage may occur if run at a negative suction pressure.

Fixing the indoor unit in place

Perform the following work on the area where gas leak test was done priorly.

After checking for gas leaks in the system, insulate the pipe, hose and cables.
Then place the indoor unit on the installation plate.


- 1. To avoid condensation problems, wrap foam insulation (as shown in the figure) on a part without insulation on the end of the pipes.
- 2. Wind the pipe, assembly cable and drain hose with vinyl tape.
- 3. Place the bundle (the pipe, assembly cable and drain hose) in the lower part of the indoor unit carefully so it does not project from the rear of the indoor unit.
- 4. Hook the indoor unit to the installation plate and move the unit to the right and left until it is securely in place.



CAUTION

- Make sure pipe does not move when you install the indoor unit on an installation plate.

- 5. Wrap the rest of the pipe with vinyl tape.
- 6. Attach the pipe to the wall using clamps (optional).

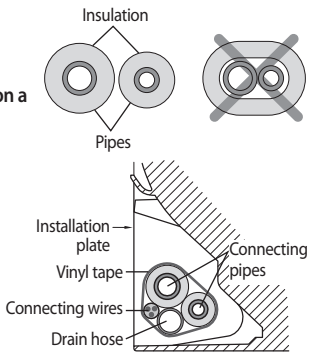

Fixing the outdoor unit in place


Install the outdoor unit in level on a stable base to avoid the generation of noise and vibration, especially when installing the unit close to a neighbor.
If you install the outdoor unit in a place exposed to strong winds or at a height, fix it to an appropriate support (wall or ground).

- 1. Place the outdoor unit as indicated on the top of the unit to let the discharged air out properly.
- 2. Fix the outdoor unit in level to an appropriate support using anchor bolts.
- 3. If the outdoor unit is exposed to strong winds, install shield plates around the outdoor unit so that the fan can operate correctly.



NOTE


- Secure the rubber leg to prevent the generation of noise and vibration.



Model	X	Y
***09/12/18**	612	317
***24**	660	340

Outdoor unit installed on the wall by rack

- Ensure the wall will be able to suspend the weight of rack and outdoor unit;
- Install the rack close to the column as much as possible;
- Install proper grommet in order to reduce noise and residual vibration transferred by outdoor unit towards wall.

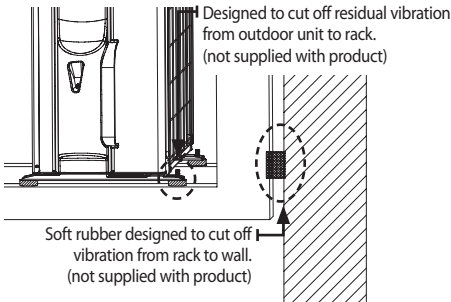


Final Check and Trial Operation

To complete the installation, perform the following checks and tests to ensure that the air conditioner operates correctly.

Check the followings:

- Strength of the installation site
- Tightness of pipe connection to detect gas leak
- Electric wiring connection
- Heat-resistant insulation of the pipe
- Drainage
- Grounding conductor connection
- Correct operation (follow the steps below)

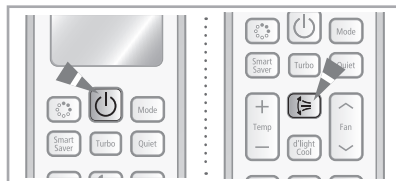

1. Press the **Power** button and check the following:

- ▶ The indicator on the indoor unit lights up.
- ▶ The airflow blade opens and the fan gears up for operation.

2. Press the **Mode** button to select Cool or Heat mode.

- ▶ In Cool mode, use **Temp +** or - button and set the temperature at 16°C.
- ▶ In Heat mode, use **Temp +** or - button and set the temperature at 30°C.



NOTE

- Approximately 3~5 minutes later, outdoor unit will start to operate and the Cool or Warm air will blow out.
- After 12 minutes of stationary condition check the indoor unit air treatment:

Cooling mode (indoor unit check) → Inlet air temp. - Outlet air temp : From 10°K to 12°K (indicative delta T)

Heating mode (indoor unit check) → Outlet air temp. - Inlet air temp : From 11°K to 14°K (indicative delta T)

In heating mode, the indoor fan motor can remain off to avoid cold air blown into conditioned space.

3. Press the **Air swing** button and check the following:

- ▶ The airflow blades work properly.

4. Press the **Power** button to stop the operation.



NOTE





- When you complete the installation successfully, hand over this manual to the user for storage in a handy and safe place.

Pump down procedure (when removing the product)

1. Turn on the air conditioner and select Cool mode to run the compressor for 3 minutes.
2. Release the valve caps on High and Low pressure side.
3. Use L wrench to close the valve on the high pressure side.
4. Approximately 2 minutes after, close the valve on the low pressure side.
5. Stop operation of the air conditioner.
6. Disconnect the pipes.

How to connect your extended power cables


Items to prepare
(compressor and insulation tape should be prepared by an installation technician.)

Tools	Crimping plier	Connection sleeve (mm)	Insulation tape	Contraction tube (mm)
Spec	MH-14	20xØ7.0(HxOD)	Width 18mm	50xØ8.0(LxOD)
Shape				


- As shown in the figure, peel off the shields from the rubber/wire of the power cable.
 - Peel off 20 mm of the wire shields of the tube installed already.




- After peeling off the tube wire, you must insert a contraction tube.




- Insert both sides of core wire of the power cable into the connection sleeve.




- Using a compressor, compress the two points and flip it over and compress another two points in the same location.
 - The compression dimension should be 8.0.
 - After compressing it, pull both sides of the wire to make sure it is firmly pressed.




- Wrap it with the insulation tape twice and position your contraction tube in the middle of the insulation tape.
- Apply heat to the contraction tube to contract it.



- After tube contraction work is completed, wrap it with the insulation tape to finish.



- In case of extending the electric wire, please DO NOT use a round-shaped pressing socket.
- Incomplete wire connections can cause electric shock or a fire.





AQV09E* Series
AQV12E* Series
AQV18E* Series
AQV24E* Series

Air Conditioner installation manual

**Planet
First** 100%
Recycled Paper

This manual is made with 100% recycled paper.



imagine the possibilities

Thank you for purchasing this Samsung product.
To receive more complete service, please
register your product at
www.samsung.com/register